

automotive booths

CLASSIC CROSSDRAFT AUTOMOTIVE BOOTHS


- **HEAVY DUTY CONSTRUCTION**
- **ANGLED TOP LIGHTING**
- **QUALITY DESIGN OPTIONS**

The Col-Met Classic Crossdraft Booth intakes fresh air through filters in the product entry doors. The clean filtered air is drawn through the booth and exhausted through a filter system at the opposite end. This type of spray booth makes efficient use of shop space and is available in solid back, drive-through and reverse-flow designs. Reverse-flow booths intake air through filters in the back wall. The solid-faced product entry doors are at the exhaust end of the booth. This provides cleaner intake filtering and better control of shop dust that might be tracked in at the vehicle entrance.

The booth can be equipped with an air replacement unit and cure cycles to meet your requirements.

LIGHTING FEATURES

Bright full booth illumination is provided by eight, four-tube, 48", 32-watt fluorescent light fixtures in the angled ceiling panels and side walls. Each is mounted behind clear tempered safety glass and sealed with a gasket. All fixtures are UL listed and approved for their intended use and placement. The light tubes are not furnished with the fixtures.

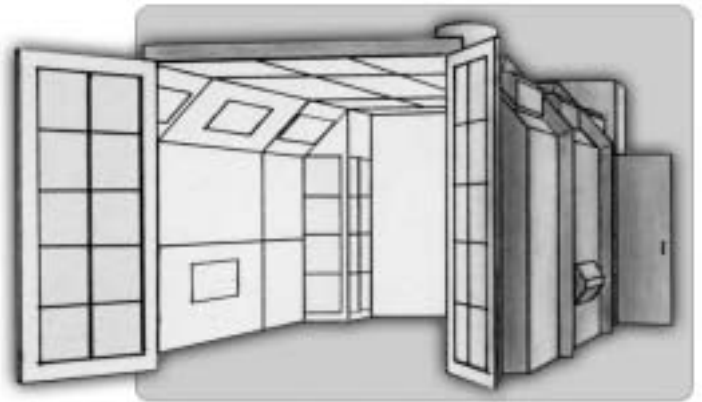

CONSTRUCTION FEATURES AND QUALITY STANDARDS

All booth walls and plenum sections are made with 18-gauge galvanized steel. All product and personnel access doors are double skinned for ease of maintenance and treated for noise control. Brixon™ latches and limit switches are provided for each door opening. Classic Crossdraft Booths are rigidly reinforced with external "I" beams.

Exhaust is provided by a 30" diameter tubeaxial fan with a 3HP, three-phase motor. Optional NEMA 12 Control Panel is available. Other electrical components may be purchased separately. All hardware, filters and sealants needed for booth installation are included.

Col-Met Spray Booth products comply with all OSHA and NFPA regulations.

BOOTH CHART WITH DIMENSIONS AND SPECIFICATIONS ON REVERSE SIDE

BOOTH CHART WITH DIMENSIONS AND SPECIFICATIONS

CLASSIC CROSSDRAFT AUTOMOTIVE BOOTHS

Model Number	Interior Dimensions			Exterior Dimensions			Access Doors	Nominal Door Opening			Illumination			Air Flow SCFM	Fan Spec.		Filters		
	Width	Height	Length	Width	Height	Length		Width	Height	Qty	Type	S&G	Open		Total	Dia.	HP	Int.	Exh.
CA24SB	14'-0"	9'-0"	24'-0"	15'-0"	10'-0"	24'-4"	1	9'-4"	8'-10 ¹ / ₂ "	1	Filter	1	7	8	12,600	30"	3 HP	24	24
CA24RF	14'-0"	9'-0"	24'-0"	15'-0"	10'-0"	24'-4"	1	9'-4"	8'-10 ¹ / ₂ "	1	Solid	1	7	8	12,600	30"	3 HP	24	24
CA24DT	14'-0"	9'-0"	24'-0"	15'-0"	10'-0"	24'-4"	1	9'-4"	8'-10 ¹ / ₂ "	2	1 of ea.	1	7	8	12,600	30"	3 HP	24	24
CA26SB	14'-0"	9'-0"	26'-0"	15'-0"	10'-0"	26'-4"	1	9'-4"	8'-10 ¹ / ₂ "	1	Filter	1	7	8	12,600	30"	3 HP	24	24
CA26RF	14'-0"	9'-0"	26'-0"	15'-0"	10'-0"	26'-4"	1	9'-4"	8'-10 ¹ / ₂ "	1	Solid	1	7	8	12,600	30"	3 HP	24	24
CA26DT	14'-0"	9'-0"	26'-0"	15'-0"	10'-0"	26'-4"	1	9'-4"	8'-10 ¹ / ₂ "	2	1 of ea.	1	7	8	12,600	30"	3 HP	24	24
CA28SB	14'-0"	9'-0"	28'-0"	15'-0"	10'-0"	28'-4"	1	9'-4"	8'-10 ¹ / ₂ "	1	Filter	1	7	8	12,600	30"	3 HP	24	24
CA28RF	14'-0"	9'-0"	28'-0"	15'-0"	10'-0"	28'-4"	1	9'-4"	8'-10 ¹ / ₂ "	1	Solid	1	7	8	12,600	30"	3 HP	24	24
CA28DT	14'-0"	9'-0"	28'-0"	15'-0"	10'-0"	28'-4"	1	9'-4"	8'-10 ¹ / ₂ "	2	1 of ea.	1	7	8	12,600	30"	3 HP	24	24
CA30SB	14'-0"	9'-0"	30'-0"	15'-0"	10'-0"	30'-4"	1	9'-4"	8'-10 ¹ / ₂ "	1	Filter	1	7	8	12,600	30"	3 HP	24	24
CA30RF	14'-0"	9'-0"	30'-0"	15'-0"	10'-0"	30'-4"	1	9'-4"	8'-10 ¹ / ₂ "	1	Solid	1	7	8	12,600	30"	3 HP	24	24
CA30DT	14'-0"	9'-0"	30'-0"	15'-0"	10'-0"	30'-4"	1	9'-4"	8'-10 ¹ / ₂ "	2	1 of ea.	1	7	8	12,600	30"	3 HP	24	24

Col-Met Spray Booths, Inc.

Dallas, TX // e-mail: sales@colmetsb.com

toll free: 888.452.6684 // www.colmetsb.com

